

LED

2018-2019

CRESCENDO INDUSTRIES CORPORATION



CRESCENDO INDUSTRIES CORPORATION

Tel : 937. 286. 6758

Email: sales@crescendoind.com

www.crescendoind.com



	Catalogue
	01-06 Bedroom ceiling light
	07-12 Mini table lamp
	13-15 Pendants
	16-22 Wall Sconces
	23-26 Outdoor wall light



Bedroom ceiling light



Model No: 500500
Overall Dimensions: 15" W. x 15" D. x 5 5/8" Ht.
Finish: Frosted White (translucent)-Brushed Chrome
Wattage: 13W LED



Model No: 500501
Overall Dimensions: 16" W. x 16" D. x 4.625" Ht.
Finish: Frosted White-Brushed Nickel
Wattage: 20-40W LED



Model No: 500504
Overall Dimensions: 16" W. x 16" D. x 4" Ht.
Finish: Frosted White-Brushed Nickel
Wattage: 13-20W LED



Model No: 500505
Overall Dimensions: 19" W. x 19" D. x 5 13/16" Ht.
Finish: Peppercorn-Frosted White
Wattage: 18-20W LED



Model No: 500502
Overall Dimensions: 12.5" W. x 12.5" D. x 5" Ht.
Finish: Frosted White-Brushed Chrome
Wattage: 18-25W LED



Model No: 500503
Overall Dimensions: 18" W. x 18" D. x 4.375" Ht.
Finish: Brushed Nickel-Frosted White
Wattage: 40W LED



Model No: 500506
Overall Dimensions: 10.5" W. x 10.5" D. x 2.75" Ht.
Finish: Silk Screen White-Clear-Brushed Nickel
Wattage: 22W LED



Model No: 500507
Overall Dimensions: 15" W. x 15" D. x 5" Ht.
Finish: Frosted White-Brushed Nickel
Wattage: 13-18W LED

Bedroom ceiling light

Crescendo Industries Corporation



Bedroom ceiling light



Model No: A500508
Overall Dimensions: 20" W. x 20" D. x 24" Ht.
Finish: Matte Black **Shade Size:** 20" T. x 20" B. x 8" Ht.
Fabric: Cream Linen **Wattage:** 40W LED



Model No: A500509
Overall Dimensions: 14" W. x 14" D. x 4.25" Ht.
Finish: Frosted White-Clear-Brushed Chrome
Wattage: 40W LED



Model No: A500510
Overall Dimensions: 14" W. x 14" D. x 4.5" Ht.
Finish: Frosted White-Hampton Bronze
Wattage: 40W LED



Model No: A500511
Overall Dimensions: 16" W. x 16" D. x 4.5" Ht.
Finish:Brushed Nickel-Frosted White
Wattage: 13~20W LED

Bedroom ceiling light

Crescendo Industries Corporation



Model No: A500512
Overall Dimensions: 36" W. x 36" D. x 12" Ht.
Finish: Plymouth Rock Powdercoat
Shade Size:36" T. x 36" B. x 8" Ht.
Fabric:White Linen **Wattage:** 11~15W LED



Model No: A500513
Overall Dimensions: 14" W. x 14" D. x 4.5" Ht.
Finish: Brushed Chrome
Shade Size:14" T. x 14" B. x 4" Ht.
Fabric:White Linen **Wattage:** 11~18W LED



Model No: A500514
Dimensions: 16" Dia. x 4" H
Finish: Dark bronze **Connection Type:** Hard wire
Socket: 3xGU24 **Shade Material:** Frosted acrylic
Wattage: 11~20W LED



Model No: A500515
Overall Dimensions: 12" Dia. x 4" H
Finish: Dark bronze **Connection Type:** Hard wire
Socket: 2xGU24 **Shade Material:** Frosted acrylic
Wattage: 25~40W LED



Bedroom ceiling light



Model No: A500516
Overall Dimensions: 22" W. x 22" D. x 11" Ht.
Finish: Matte Chrome
Shade Size: 20" T. x 22" B. x 11" Ht.
Fabric: White Variegated **Wattage:** 9~11W LED



Model No: A500518
Overall Dimensions: 36" W. x 36" D. x 24" Ht.
Finish: Dark Bronze
Shade Size: 36" T. x 36" B. x 12" Ht.
Fabric: Cream Linen **Wattage:** 18W LED



Model No: A500517
Overall Dimensions: 20.625" W. x 20.625" D. x 11" Ht.
Finish: St. Simons Bronze
Shade Size: 20" T. x 20" B. x 7.5" Ht.
Fabric: Homespun Natural (outer)-Ivory Linen (inner)
Wattage: 9~11W LED



Model No: A500519
Dimensions: 4" H x 11.75" W x 11.75" D
Finish: Polished chrome **Connection Type:** Hard wire
Socket: 2xGU24 **Shade Material:** Frosted white glass
Wattage: 18W LED

Bedroom ceiling light

Crescendo Industries Corporation



Model No: A500520
Description: 16" Ceiling Light with Alabaster Glass Diffuser and Brushed Nickel Accents
Dimensions: 16" dia. X 6" H **Finish:** Brushed Nickel
Connection Type: Hard Wire **Socket:** 2 x Medium Base
Shade Item No: N/A - Integrated
Shade Material: Alabaster Glass
Wattage: 18~30W LED



Model No: A500521
Escription: 22" Ceiling Light with Linen Shade, Frosted Acrylic Diffuser and Brushed Nickel Accents
Dimensions: 22" dia. X 6" H **Finish:** Brushed Nickel
Connection Type: Hard Wire **Socket:** 3 x Medium Base
Shade Item No: N/A - Integrated
Shade Material: Pure White Linen
Wattage: 18W LED

Model No: A500522
Finish: Brushed Nickel Steel
Dimensions: 15" DIA x 5" H
Shade Material: Frosted acrylic
Wattage: 18~30W LED



Mini table lamp



Model No: T800804

Description: 31" H x 15" W
Finish: Titanium silver / brushed nickel
Base/Wall Plate: 9" W x 6" D
Outlets: 1 Convenience outlet
Switch: Rocker on base
Connection Type: Plug-in
Socket: 1xMedium base
Shade Item No: STX-TL521-SH
Shade Material: Pure white linen
Shade Style: Straight rectangle
Shade Dimensions: 15" W x 9" D x 11.5" H
Wattage: 3~5W LED



Model No: T800805

Item Number: 51293-EQ9-L05D
Overall Dimensions: 6" W. x 6" D. x 18" Ht.
Finish: Neuhaus Gun Metal- Ashwood
Wattage: 3~5W LED

Mini table lamp

Crescendo Industries Corporation



Model No: T800806

Overall Description: 12" W. x 12" D. x 21.5" Ht.
Finish: Antique Bronze-Satin Nickel
Shade Size: 12" T. x 12" B. x 8" Ht.
Fabric: White Linen
Wattage: 3~5W LED



Model No: T800807

Dimensions: 28"H x 14"W
Finish: Brushed Nickel
Base/Wall Plate: 7" Dia.
Outlets: None
Switch: Rocker on Base
Connection Type: Plug-in
Socket: Medium Base
Shade Item No: STX-1556ET-SH
Shade Material: Pure White Linen
Shade Style: Tapered Round
Shade Dimensions: 12" Dia. T x 14" Dia. B x 10"H
Wattage: 3~5W LED



Mini table lamp



Model No: T800808

Dimensions: 31.5" H x 15" W
Finish: Ebony and Burnished Brass
Base/Wall Plate: 6.5" Dia.
Outlets: 2 Convenience Outlets
Switch: 2 Rockers on Base
Connection Type: Plug-In
Socket: 2 x Medium Base
Shade Item No: STX-1253TT-SH
Shade Material: Pure White Linen
Shade Style: Tapered Round
Shade Dimensions: 13" T x 15" B x 11" H
Wattage: 3~5W LED



Model No: T800809

Dimensions: 29.5" H x 16" W
Finish: Bronze and Dark Wood
Base/Wall Plate: 6.5" Square
Outlets: 1 Convenience Outlet
Switch: Rocker on Base
Connection Type: Plug-In
Socket: Medium Base
Shade Item No: STX-1258ET-SH
Shade Material: Pure White Linen
Shade Style: Straight Round
Shade Dimensions: 16" T x 16" B x 10.5" H
Wattage: 3~5W LED

Mini table lamp

Crescendo Industries Corporation



Model No: T800810

SPECIAL ORDER
Description: Single Table Lamp with Ebony and Burnished Brass Accents
Dimensions: 31.5" H x 15" W
Finish: Ebony and Burnished Brass
Base/Wall Plate: 6.5" Dia.
Outlets: 2 Convenience Outlets
Switch: Rocker on Base
Connection Type: Plug-In
Socket: Medium Base
Shade Item No: STX-1252TS-SH
Shade Material: Pure White Linen
Shade Style: Tapered Round
Shade Dimensions: 13" T x 15" B x 11" H
Wattage: 3~5W LED



Model No: T800811

Dimensions: End Table Lamp with Ebony and Brushed Nickel Finish
Dimensions: 15"W x 24.5"H
Finish: Ebony and Brushed Nickel
Base/Wall Plate: 7" Dia.
Outlets:
2 Convenience Outlets
Switch: Rocker on Base
Connection Type: Plug-In
Socket: Medium Base
Shade Item No: STX-1358ET-SH
Shade Material: Pure White Linen
Shade Style: Straight Round
Shade Dimensions: 15" Dia. T x 15" Dia. B x 9" H
Wattage: 3~5W LED



Pendants



Model No: T700700

Overall Dimensions: 6" W. x 6" D. x 115.75" Ht. Adjustable
Finish: Matte Bronze-Clear
Wattage: 7~11W LED



Model No: D700701

Dimensions: 42"H x 15"W **Finish:** Brushed nickel
Base/Wall Plate: 8" Dia. **Switch:** Rocker switch on crossbar
Connection Type: Hard wire **Socket:** 2x Medium base
Shade Item No: STX-PD314-SH
Shade Material: Pure white linen
Shade Style: Straight round
Shade Dimensions: 15"Dia. x 10" H
Wattage: 7~11W LED



Model No: D700702

Overall Dimensions: 13" W. x 13" D. x 112.25" Ht. Adjustable
Finish: Matte Bronze-Clear
Wattage: 7~9W LED



Model No: D700703

Overall Dimensions: 5" T. x 5" B. x 80" Ht. Adjustable
Finish: Satin White with Plymouth Rock trim (Powdercoat)
Shade Size: 5" T. x 5" B. x 5" Ht. **Fabric:** White Linen
Wattage: 7~11W LED

Pendants

Crescendo Industries Corporation



Model No: D700704

Overall Dimensions:
14" W. x 14" D. x 17.25" to 28" Ht. Adjustable
Finish: Brushed Nickel **Shade Size:** 14" T. x 14" B. x 8" Ht.
Fabric: Champagne-White Linen **Wattage:** 7~13W LED



Model No: D700705

Overall Dimensions: 7" W. x 7" D. x 28" Ht. Adjustable
Finish: Frosted White-Brushed Nickel
Wattage: 7~9W LED



Model No: D700706

Overall Dimensions: 13" W. x 13" D. x 112.25" Ht. Adjustable
Finish: Matte Bronze-Clear
Wattage: 7~9W LED



Model No: D700707

Overall Dimensions: 23" W. x 6" D. x 52" Ht.
Finish: Cold Rolled Steel
Shade Size: 2" T. x 4.75" B. x 10" Ht.
Wattage: 9~13W LED



Pendants



Model No: D700708
Overall Dimensions: 4.75" W. x 4.75" D. x 21" Adjustable
Finish: Polished Chrome-Clear
Wattage: 7~11W LED



Model No: D700709
Overall Dimensions: 20" W. x 20" D. x 26.5" Ht. Adjustable
Finish: Painted Brass
Wattage: 11~20W LED



Model No: D700710
Overall Dimensions: 14" W. x 14" D. x 40" Ht.
Finish: Kona Blend-Brushed Nickel
Shade Size: 14" T. x 14" B. x 10" Ht.
Fabric: White Linen
Wattage: 11~15W LED



Model No: D700711
Overall Dimensions: 6" W. x 6" D. x 33" Ht. Adjustable
Finish: Brushed Nickel-Frosted White
Wattage: 9~15W LED

Wall Sconces

Crescendo Industries Corporation



Model No: B600600
Overall Dimensions: 8" W. x 4" D. x 16" Ht.
Finish: Brushed Nickel-Frosted White Acrylic Diffuser
Electrical Options*: GU24 Socket Base, Hardwired
Wattage: 18W LED



Model No: B600601
Overall Dimensions: 6" W. x 4" D. x 10" Ht.
Finish: Brushed Nickel-Frosted White
Shade Size: 2.75:6" T. x 2.75:6" B. x 6.5" Ht.
Frosted White Glass
Wattage: 18W LED




Model No: B600602
Dimensions: 19.5" H x 6.5" W x 4" D
Finish: Dark bronze **Base/Wall Plate:** 19.5" H x 6.5" W
Connection Type: Hard wire
Socket: 1xGU24 **Shade Material:** Frosted acrylic
Wattage: 18W LED



Model No: B600603
Dimensions: 12.5" H x 6.5" W x 4" D
Finish: Dark bronze **Base/Wall Plate:** 12.5" H x 6.5" W
Connection Type: Hard wire
Socket: 1xGU24 **Shade Material:** Frosted acrylic
Wattage: 18W LED



Wall Sconces

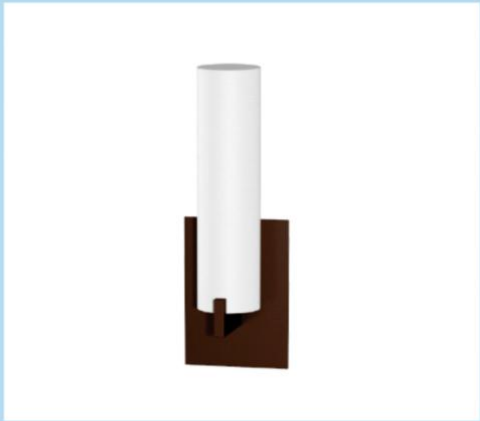

Model No: B600604
Dimensions: 14" H x 5" W x 4.5" D
Finish: Bronze **Base/Wall Plate:** 8" H x 5" W
Socket: 1xGU24 **Shade Material:** Frosted acrylic
Shade Style: Straight round
Shade Dimensions: 3" Dia. x 11.5" H
Wattage: 5~18W LED



Model No: B600605
Dimensions: 5" H x 50" W x 4.75" D
Finish: Dark bronze
Base/Wall Plate: 5" H x 50" W x 4.75" D
Connection Type: Hard wire **Socket:** 4xGU24
Shade Material: Frosted acrylic
Wattage: 4x5W LED



Model No: B600606
Dimensions: 5" H x 25" W x 4" D
Finish: Dark bronze **Socket:** 3xGU24
Shade Material: Frosted acrylic
Socket: 3xGU24
Wattage: 3X5W LED



Model No: B600607
Dimensions: 5" H x 24.25" W x 4.75" D
Finish: Dark bronze **Base/Wall Plate:** 5" H x 24.25" W
Connection Type: Hard wire **Socket:** 2xGu24
Shade Material: Frosted acrylic
Wattage: 2X5W LED

Wall Sconces

Crescendo Industries Corporation



Model No: B600608
Dimensions: 6.25" H x 25.75" W x 4" D
Finish: Dark bronze **Base/Wall Plate:** 6.25" H x 25.75" W
Connection Type: Hard wire **Socket:** 2xGU24
Shade Material: Frosted acrylic
Wattage: 5~18W LED



Model No: B600609
Dimensions: 6.25" H x 38" W x 4" D
Finish: Dark bronze **Base/Wall Plate:** 6.25" H x 38" W
Connection Type: Hard wire
Socket: 3xGU24 **Shade Material:** Frosted acrylic
Wattage: 5~18W LED



Model No: B600610
Dimensions: 20.5"H x 4.75"W x 5.75"D
Finish: Brushed Nickel **Base/WallPlate:** 7"H x 4.75"W
Switch: N/A **Connection Type:** Hard Wire
Socket: 2 x Medium Base **Shade Item No:** N/A - Integrated
Shade Material: Frosted White Glass **Wattage:** 5~18W LED



Model No: B600611
Dimensions: 5" H x 52" W x 4.75" D
Dimensions: 5" H x 25" W x 4.75" D
Finish: Polished chrome **Connection Type:** Hard wire
Socket: T8-G13 17W Fluorescent
Shade Material: White acrylic



Wall Sconces



Model No: B600612
Dimensions: 5" H x 24.5" W x 4" D
Dimensions: 5" H x 49" W x 4" D
Finish: Brushed Nickel
Base/Wall Plate: 5" H x 25" W
Switch: N/A **Connection Type:** Hard Wire
Socket: 2 x T8 32W Fluorescent
Shade Item No: N/A - Integrated
Shade Material: White Acrylic



Model No: B600614
Dimensions: 12"H Satin Nickel and Frosted White Glass Wall/Corridor Sconce
Dimensions: 12"H x 11"W x 4"D
Finish: Brushed Nickel
Base/Wall Plate: 12"H x 10"W
Switch: N/A
Connection Type: Hard Wire
Socket: Medium Base
Shade Item No: N/A - Integrated
Shade Material: Frosted White Glass
Wattage: 5~18W LED



Model No: B600613
Description: 31" 5 Light Vanity Fixture with Brushed Nickel Finish and Opal Glass Shades
Dimensions: 8"H x 31"W x 6"D
Finish: Brushed Nickel
Base/Wall Plate: 5.25" Dia
Switch: N/A **Connection Type:** Hard Wire
Socket: 5 x Medium Base
Shade Item No: N/A - Integrated
Shade Material: Frosted White Glass



Model No: B600615
Description: 48" Vanity Bath Bar Fixture with Brushed Nickel Finish and Frosted Acrylic Diffuser
Dimensions: 6.25"H x 48"W x 4"D
Finish: Brushed Nickel
Base/Wall Plate: 6.25"H x 48"W
Switch: N/A **Connection Type:** Hard Wire
Socket: 2 x T8 36W Fluorescent
Shade Item No: N/A - Integrated
Shade Material: Frosted Acrylic

Wall Sconces

Crescendo Industries Corporation



Model No: B600616
Dimensions: 14"H Brushed Nickel and White Opal Glass Wall/Vanity Sconce
Dimensions: 14"H x 5.5"W x 5.5"D
Finish: Brushed Nickel
Base/Wall Plate: 5.5" Dia.
Switch: N/A **Connection Type:** Hard Wire
Socket: Medium Base **Shade Item No:** N/A - Integrated
Shade Material: Frosted White Glass **Wattage:** 5~18W LED



Model No: B600618
Dimensions: 17" H x 4" W x 4" D
Finish: Polished chrome
Base/Wall Plate: 15.5" H x 4" W
Connection Type: Hard Wire
Socket: 1 x GU24
Shade Material: White frosted glass
Wattage: 5~18W LED



Model No: B600617
Description: 9.5"H Brushed Nickel and Opal Glass Wall/Corridor Sconce
Dimensions: 9.5"H x 6"W x 4"D
Finish: Brushed Nickel
Switch: N/A **Connection Type:** Hard Wire
Socket: Medium Base
Shade Item No: N/A - Integrated
Shade Material: Frosted White Glass
Wattage: 5~18W LED



Model No: B600619
Description: 13.5" H x 4.5" W x 4.5" D
Finish: Brushed nickel
Wall plate size: 4.5" W x 6" H
Connection type: Hard wire
Socket: LED
Shade material: Frosted glass
Shade style: Straight round
Wattage: 5~18W LED

Wall Sconces



Model No: B600620
Dimensions: 14" H x 5" W x 4.5" D
Finish: Bronze **Base/Wall Plate:** 8" H x 5" W
Connection Type: Hard wire
Socket: 1xGU24 **Shade Material:** White opal glass
Shade Style: Straight round
Shade Dimensions: 3" Dia. x 11.5" H
Wattage: 5~18W LED



Model No: B600621
Material:
Die-casting aluminum frosted glass Light size
Width:5"
Depth:5-3/4"
Height:1-3/4"
LED 9W



Model No: B600622
Main color: Brushed Brass
Lamp dimensions: 5"W, 10"H, 4"D
Shade dimensions: 3-1/8"W, 6"H
Shade material: Frosted White Acrylic
Finish: Brushed Brass **Power cord:** direct wired
Switch: on/off rocker switch **Socket:** medium base
Voltage: 120 **Bulb wattage:** Recommend 1100 lumen LED bulb, max rating 14 watt CFL
Base: 5"W, 5"H **Harp:** NA



Model No: B600623
Main color: Brushed Nickel
Lamp dimensions: 5-3/4"W, 10"H, 8"D
Shade dimensions: NA
Shade material: Frosted Glass
Finish: Brushed Nickel
Power cord: direct wired
Switch: NA **Socket:** GU24
Voltage: 120 **Bulb wattage:** Recommend 13 watt CFL bulb with GU24 base
Base: 5-3/4"W **Harp:** NA

Wall Sconces

Crescendo Industries Corporation



Model No: B600624
Main color: Polished Chrome
Lamp dimensions: 11.75"H, 4.5"W, 6"D
Shade dimensions: 8"H, 4"W
Shade material: Frosted White Acrylic
Finish: Polished Chrome **Power cord:** Direct wired
Switch: NA **Socket:** Gu24 **Voltage:** 120
Bulb wattage: Recommend 1100 lumen LED bulb with GU24 base
Base: 4.5"W, 4.5"H **Harp:** NA



Model No: B600625
Main color: Brushed Nickel
Lamp dimensions: 6"W, 10"H, 4"D
Shade dimensions: 6"W, 6.25"H, 3"D
Shade material: White Frosted Glass
Finish: Brushed Nickel **Power cord:** direct wired
Switch: NA **Socket:** medium base
Voltage: 120 **Bulb wattage:** Recommend 1100 lumen LED bulb, max rating 14 watt CFL
Base: 4.5"W, 4.5"H **Harp:** NA



Model No: B600626
Main color: Brushed Nickel
Lamp dimensions: 10.75"H, 7-7/8"W, 8-7/8"D
Shade dimensions: 8"H, 7-7/8"W
Shade material: White Frosted Acrylic Diffuser
Finish: Brushed Nickel **Power cord:** 10' SPT-2 Silver Cord
Switch: NA **Socket:** medium base
Voltage: 120 **Bulb wattage:** Recommend 1600 lumen LED bulb, max rating 27 watt CFL
Base: 5.5"W, 10.75"H **Harp:** NA



Outdoor wall light




Model No: B300301
Material:
Die-cast aluminum Frosted glass
Dimensions
Width: 6-7/8"
Depth: 7-3/4"
Height: 10-5/8"
LED 9W



Model No: B300302
Material:
Die-cast aluminum water pattern frosted glass
Material:
Width: 7"
Depth: 7-1/2"
Height: 13"
LED 9W



Model No: B300303
Material:
Die-cast aluminum Frosted glass
Dimensions:
Width: 6"
Depth: 8"
Height: 11"
LED 9W

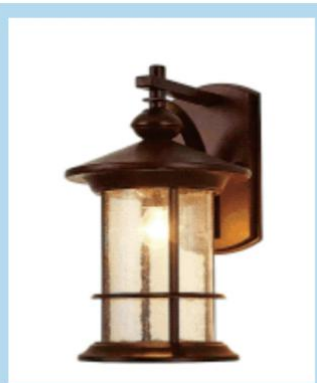

Model No: B300307
Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 7-5/8"
Depth: 9-7/8"
Height: 12-7/8"
LED 9W



Model No: B300308
Material:
Die-cast aluminum Frosted glass
Material:
Width: 8"
Depth: 10"
Height: 13-1/4"
LED 9W



Model No: B300309
Material:
Die-cast aluminum water pattern frosted glass
Material:
Width: 7"
Depth: 7-1/2"
Height: 13"
LED 9W



Model No: B300304
Material:
Die-cast aluminum Frosted glass
Material:
Width: 9"
Depth: 12-1/4"
Height: 21-1/4"
LED 9W



Model No: B300305
Material:
Die-cast aluminum water pattern frosted glass
Material:
Width: 6-1/4"
Depth: 9"
Height: 14-3/8"
LED 9W



Model No: B300306
Material:
Die-cast aluminum Frosted glass
Material:
Width: 10"
Depth: 6-1/2"
Height: 8"
LED 9W



Model No: B300310
Material:
Die-cast aluminum Frosted glass
Material:
Width: 4-3/4"
Depth: 4-1/2"
Height: 8-3/8"
LED 3W



Model No: B300311
material:
Die-cast aluminum water pattern frosted glass
material
Width: 9-1/4"
Depth: 13"
Height: 21-1/2"
LED 9W



Model No: B300312
Material:
Die-cast aluminum Frosted glass
Material:
Width: 6-1/4"
Depth: 7-1/4"
Height: 10"
LED 9W

Outdoor wall light

Crescendo Industries Corporation



Outdoor wall light




Model No: B300313

material:
Die-cast aluminum Frosted glass
material:
Width: 7"
Depth: 9-1/2"
Height: 12"
LED 9W




Model No: B300314

material:
Die-cast aluminum Frosted glass
material:
Width: 9-1/4"
Depth: 13"
Height: 21-1/4"
LED 9W

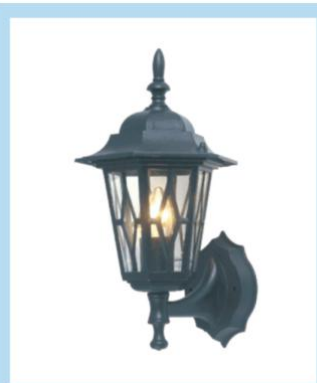

Model No: B300315

Material:
Die-cast Aluminum Frosted Glass
Material:
Width: 7-3/4"
Depth: 8"
Height: 14-3/8"
Led 9W

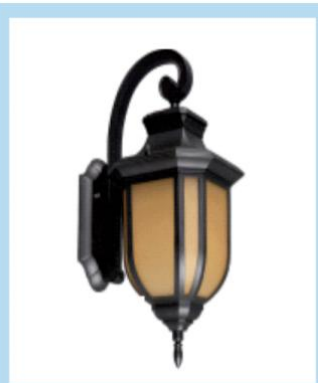

Model No: B300319

Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 9"
Depth: 11-3/4"
Height: 21-5/8"
Led 9W



Model No: B300320

Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 6-5/16"
Depth: 9-1/2"
Height: 13"
Led 9W



Model No: B300321

Material:
Die-cast Aluminum Acrylic
Material:
Width: 7-1/2"
Depth: 4-1/4"
Height: 9-3/4"
Led 7W



Model No: B300316

Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 6-3/4"
Depth: 7-1/2"
Height: 13-3/4"
Led 9W



Model No: B300317

Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 7-1/4"
Depth: 9-1/2"
Height: 17-5/16"
Led 9W



Model No: B300318

Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 9"
Depth: 5-5/16"
Height: 11-3/16"
Led 7W



Model No: B300322

Material:
Die-casting Aluminum Frosted Glass
Material:
Width: 10"
Depth: 4-3/4"
Height: 12-3/8"
Led 9W

Outdoor wall light


Crescendo Industries Corporation

LED SLIM PANEL LIGHT



Features


- All the products certificated by UL, CUL, Energy Star etc.
- Driver on Board LED light Engines
- 120V input, 50/60Hz
- PF>0.9
- Wet Location / Damp Location
- CRI 80 or 90 optional
- Ambient temperature: -20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)

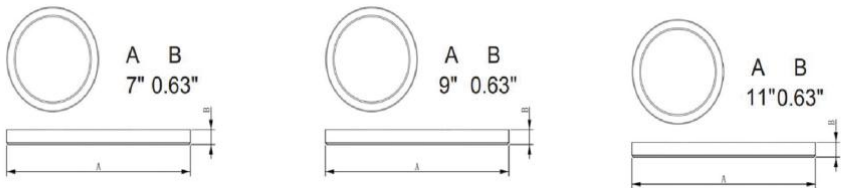

Product Specification


Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-PL07KD412W	12W	840	7"	0.63"	2700K-4000K	80/90	Yes
WOR-PL09KD415W	15W	1100	9"	0.63"	2700K-4000K	80/90	Yes
WOR-PL12KD420W	20W	1400	11"	0.63"	2700K-4000K	80/90	Yes

LED SLIM PANEL LIGHT



Features


- All the products certificated by ETL/cETL etc.
- Driver on Board LED light Engines
- 120V input, 50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature: -20°C to 45°C
- Triac dimming of 100%-10%
- 3 years limited warranty (term and conditions apply)

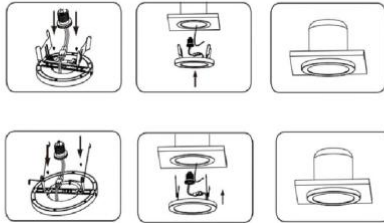

Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)

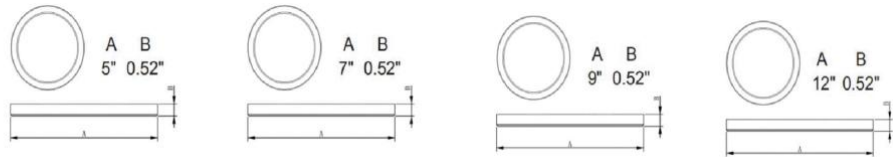


Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-PLR5-6W	6W	380	5"	0.52"	3000K-6000K	80/90	Yes
WOR-PLR7-12W	12W	800	7"	0.52"	3000K-6000K	80/90	Yes
WOR-PLR9-18W	18W	1200	9"	0.52"	3000K-6000K	80/90	Yes
WOR-PLR12-24W	24W	1680	12"	0.52"	3000K-6000K	80/90	Yes

LED DISK LIGHT



Product Dimension(inch)




Features

- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)

Benefits


- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

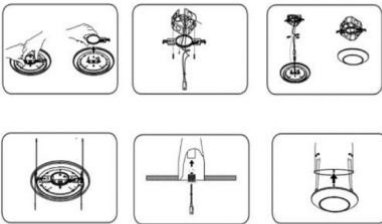

Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-DL40CYFe411W	11W	680	5.8"	1.54"	3000K-6000K	80/90	Yes
WOR-DL40CYAL3-11W	11W	680	5.8"	1.54"	3000K-6000K	80/90	Yes
WOR-DL60CYFe413W	13W	840	7.35"	1.96"	3000K-6000K	80/90	Yes
WOR-DL60CYAL3-13W	13W	840	7.35"	1.96"	3000K-6000K	80/90	Yes
WOR-DL60CYAL3-17W	17W	1100	7.35"	1.96"	3000K-6000K	80/90	Yes
WOR-DL6DGFQ-15W	15W	1000	7.51"	1.08"	3000K-6000K	80/90	Yes

LED DOWN LIGHT

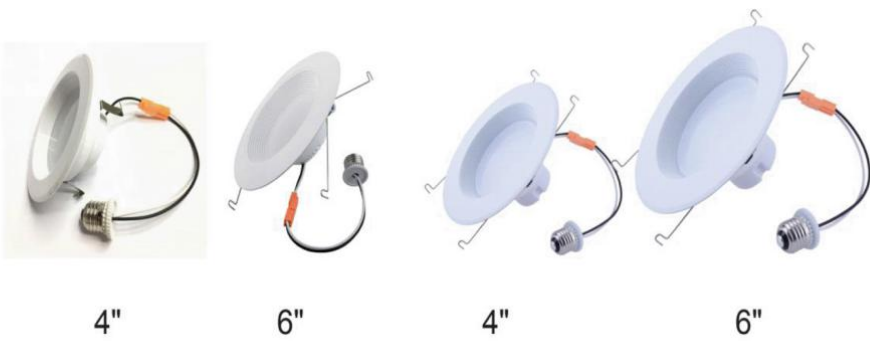


Features

- All the products certificated by UL/cUL, Energy Star etc.
- 120V input,50/60Hz
- PF>0.9
- Wet Location And Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)

Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)



Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-DL4DWP-10W	10W	650	7.5"	2.83"	2700K-6000K	80	Yes
WOR-DL4DWP-13W	13W	850	7.5"	2.83"	2700K-6000K	80	Yes
WOR-DL4DGWP-10W	10W	650	7.5"	2.83"	2700K-6000K	90	Yes
WOR-DL4DGWP-13W	13W	850	7.5"	2.83"	2700K-6000K	90	Yes
WOR-DL6DWP-11W	11W	750	7.5"	3.30"	2700K-6000K	80	Yes
WOR-DL6DWP-13W	13W	900	7.5"	3.30"	2700K-6000K	80	Yes
WOR-DL6DWP-18W	18W	1200	7.5"	3.30"	2700K-6000K	80	Yes
WOR-DL6DGWP-12W	12W	750	7.5"	3.30"	2700K-6000K	90	Yes
WOR-DL6DGWP-15W	15W	900	7.5"	3.30"	2700K-6000K	90	Yes
WOR-DL6DGWP-18W	18W	1200	7.5"	3.30"	2700K-6000K	90	Yes

LED DOWN LIGHT




Features

- All the products certificated by UL/cUL, Energy Star etc.
- 120V input,50/60Hz
- PF>0.9
- Wet Location And Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)

Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)

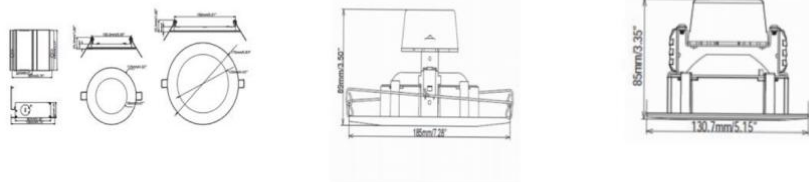

Product Specification


Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-DL4DUT-10W	10W	650	4.92"	1.0"	2700K-6000K	80	Yes
WOR-DL6DUT-14W	14W	850	4.92"	1.0"	2700K-6000K	80	Yes
WOR-DL4DGUT-12W	12W	700	6.89"	1.0"	2700K-6000K	90	Yes
WOR-DL6DGUT-15W	15W	900	6.89"	1.0"	2700K-6000K	90	Yes
WOR-DL4DGRT-10W	10W	600	5.15"	3.35"	2700K-6000K	90	Yes
WOR-DL6DGRT-13W	13W	800	7.28"	3.50"	2700K-6000K	90	Yes

LED FLUSH MOUNT



Features

- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)



Product Specification


Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE11S15W-MBF	15W	1100	11"	3.0"	2700K-5000K	80/90	Yes
WOR-CE14S24W-MBF	25W	1800	14"	3.5"	2700K-5000K	80/90	Yes
WOR-CE00CF13SG	24W	1500	13"	2.5"	2700K-5000K	80/90	Yes
WOR-CE00CF17SG	30W	1800	17"	2.8"	2700K-5000K	80/90	Yes
WOR-CE00CF21SG	35W	2200	21"	3.0"	2700K-5000K	80/90	Yes

LED FLUSH MOUNT



Features


- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warrantly (term and conditions apply)



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)

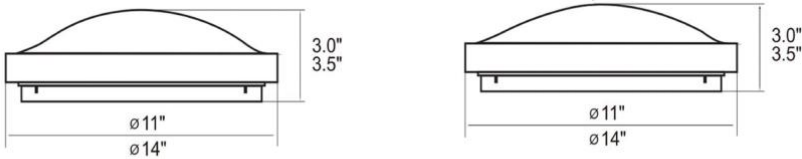

Product Specification


Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE11R15W-JBY	15W	1000	11"	3.0"	2700K-5000K	80/90	Yes
WOR-CE14R24W-JBY	25W	1500	14"	3.5"	2700K-5000K	80/90	Yes
WOR-CE11S15W-JBF	15W	1000	11"	3.0"	2700K-5000K	80/90	Yes
WOR-CE14S24W-JBF	25W	1500	14"	3.5"	2700K-5000K	80/90	Yes

LED FLUSH MOUNT



Features

- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warrantly (term and conditions apply)



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)



Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CEDC10R15W	15W	1100	10"	3.42"	2700K-5000K	80/90	Yes
WOR-CEDC12R15W	15W	1500	12"	3.42"	2700K-5000K	>82	Yes
WOR-CE00DC14R15W/20W/25W	25W	1800	14"	3.42"	2700K-5000K	80/90	Yes
WOR-CE00DC1615W/20W/25W	26W	1850	16"	3.42"	2700K-5000K	80/90	Yes
WOR-CE00DC18DRIVER	30W	2200	18"	3.42"	2700K-5000K	80/90	Yes
WOR-CE00DC32WPDR	50W	3500	32.5"	4.4"	2700K-5000K	80/90	Yes

LED FLUSH MOUNT




Features



- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)

Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required



Product Dimension(inch)



Product Specification


Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE03CY11SGDOBSSCGKX	15W	780	11.02"	9.45"	2700K-5000K	80/90	Yes
WOR-CE03CY11SGDOBSSCSNGX	15W	780	9.45"	9.45"	2700K-5000K	80/90	Yes
WOR-CE00CY13CTDOB3IML	20W	1100	13"	6.6"	2700K-5000K	80/90	Yes

LED FLUSH MOUNT



Features




- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warranty (term and conditions apply)



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

Product Dimension(inch)



Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE11R15W-MBY	15W	1100	11"	3.8"	2700K-5000K	80/90	Yes
WOR-CE14R24W-MBY	25W	1800	14"	4.1"	2700K-5000K	80/90	Yes
WOR-CE00CY16SG-YY-U	24W	2000	22"	3.7"	2700K-5000K	80/90	Yes
WOR-CE00CY18SG-YY-U	30W	2200	20"	3.8"	2700K-5000K	80/90	Yes
WOR-CE00CY20SG-YY-U	35W	2500	18"	3.9"	2700K-5000K	80/90	Yes
WOR-CE00-CY22SG-YY-U	40W	2800	16"	4.0"	2700K-5000K	>82	Yes
WOR-CE00CY6DOBIML	10W	680	6"	2.6"	2700K-5000K	80/90	Yes
WOR-CE00CY8DOBIML	12W	860	8.2"	3.3"	2700K-5000K	80/90	Yes


LED FLUSH MOUNT

Glass: 




Features

- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Boad LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warrantly (term and conditions apply)



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

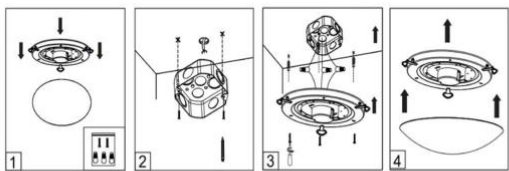

Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE00CY11CPG3IML	15W	1200	ø11"	6.5"	2700K-5000K	80/90	Yes
WOR-CE00CY11CPG3IML	15W	1200	ø11"	6.5"	2700K-5000K	80/90	Yes
WOR-CE00CY11CPG3IML	15W	1200	ø11"	6.5"	2700K-5000K	80/90	Yes

LED FLUSH MOUNT



Features

- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Boad LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warrantly (term and conditions apply)


5 Kinds of CCT tunable
2700K / 3000K / 3500K / 4000K / 5000K



Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required


Product Dimension(inch)



Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-5CCTDOBHB	18W	1000-1100	ø11"	3.3"	2700K-5000K	80/90	Yes
WOR-5CCTDOBDC	18W	1000-1100	ø12"	3.4"	2700K-5000K	80/90	Yes
WOR-5CCTDOBMR	25W	1650-1800	ø14"	4.1"	2700K-5000K	80/90	Yes

LED PIR CEILING AIXTURE

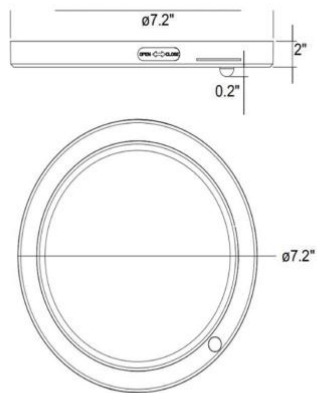


Features


- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Boad LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warrantly (term and conditions apply)

Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

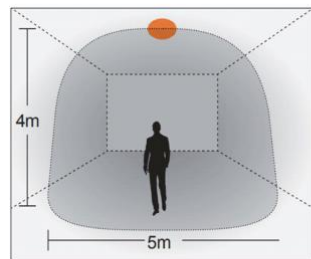

ceiling mounting pattern (m)

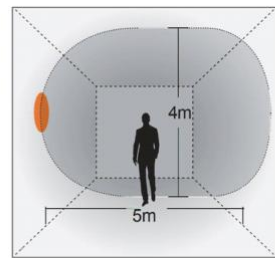

wall mounting pattern (m)

Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE03CY11SGDOBSSCGK0X	15W	780	ø11.02"	9.45"	2700K-5000K	80/90	Yes





LED VANITY LIGHT



Features

- UL/CUL,Energy Star,FCC Listed
- 100%-10% Triac Dimming
- No UV or IR Radiation
- CRI 80/90 Optional , Power Factor >0.95
- 35,000 Hours Lifespan, 3 Years Warranty

Product Dimension(inch)

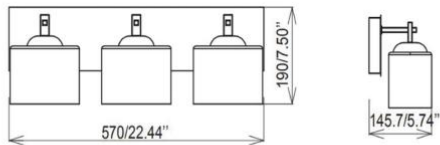

Product Specification


Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-MF-S224D28	28W	2100	23.74"	0.9"	2700K-5000K	80/90	Yes
WOR-MFS124D28	28W	2000	24.01"	7.76"	2700K-5000K	80/90	Yes
WOR-MF-S222D20	20W	1800	22.44"	4.92"	2700K-5000K	80/90	Yes
WOR-MF-S122D28	28W	2000	22.44"	7.50"	2700K-5000K	80/90	Yes

LED SENSOR CEILING AIXTURE



Features

- All the products certificated by UL/cUL, ETL/cETL Energy Star etc.
- Driver on Board LED light Engines
- 120V input,50/60Hz
- PF>0.9
- Damp Location
- CRI 80 or 90 optional
- Ambient temperature:-20°C to 45°C
- Triac dimming of 100%-10%
- 5 years limited warrantly (term and conditions apply)

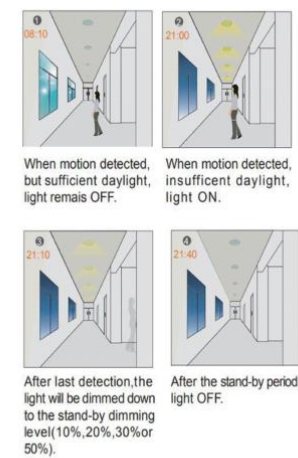

Benefits

- Ideal replacement for traditional fixtures
- NO UV or IR radiation
- Low flicker and noise free
- No bulb replacement is required

		2	1			4	3	
I	ON	ON	100%	I-100%	I	ON	ON	5s
II	-	ON	75%	II-75%	II	-	ON	90 s
III	ON	-	50%	III-50%	III	ON	-	3min
IV	-	-	25%	IV-25%	IV	-	-	10 min

		6	5			8	7	
I	ON	ON	+∞	I- +∞	I	ON	ON	0s
II	-	ON	50 Lux	II- 50Lux	II	-	ON	30 s
III	ON	-	15 Lux	III- 15Lux	III	ON	-	10 min
IV	-	-	5 Lux	IV- 5Lux	IV	-	-	+∞

I-5s
II- 90 s
III- 3min
IV- 10min

I-0s
II- 30 s
III- 10min
IV- +∞

Product Specification

Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-CE00CY14G3DOB	15W	1000	11"	3"	2700K-5000K	80/90	Yes
WOR-CE00CY14G3DOB	25W	1700	11"	3.5"	2700K-5000K	80/90	Yes
WOR-CE00DC12G3DOB	20W	1400	12"	3.4"	2700K-5000K	80/90	Yes
WOR-CE00DC14G3DOB	25W	1750	14"	3.9"	2700K-5000K	80/90	Yes
WOR-CE00CY11GKDOB3IML	18W	1080	11"	3.7"	2700K-5000K	80/90	Yes
WOR-CE00CYMW15WDOB	15W	1100	11"	3.8"	3000K-5000K	80/90	Yes
WOR-CE00CY14MW25WDOB	25W	1750	14"	4.1"	3000K-5000K	80/90	Yes


LED WALL LIGHT



Features

- UL/CUL,Energy Star,FCC Listed
- 100%-10% Triac Dimming
- No UV or IR Radiation
- CRI 80/90 Optional , Power Factor>0.95
- 35,000 Hours Lifespan, 3 Years Warranty

Product Dimension(inch)

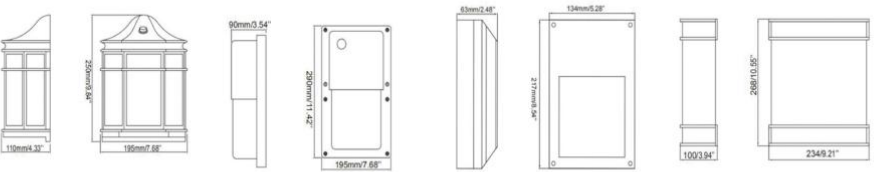

Product Specification

Model Number	Wattage	Lumen	Length	Width	Height	CCT	CRI	Dimmable
WOR-WL-H1812	12W	600	9.84"	7.68"	4.33"	2700K-5000K	80/90	Yes
WOR-WL-H1823	23W	1200	11.42"	7.68"	3.54"	2700K-5000K	80/90	Yes
WOR-WL-R1815	15W	1050	8.54"	5.28"	2.48"	2700K-5000K	80/90	Yes
WOR-WL-R1823	23W	1650	10.55"	9.21"	3.94"	2700K-5000K	80/90	Yes

LED SHOP LIGHT





Features

- UL/CUL,Energy Star,FCC Listed
- 100%-10% Triac Dimming
- No UV or IR Radiation
- CRI 80/90 Optional , Power Factor >0.95
- 35,000 Hours Lifespan, 3 Years Warranty



Product Dimension(inch)



Product Specification



Model Number	Wattage	Lumen	Diameter	Height	CCT	CRI	Dimmable
WOR-SL-003MF-40	15W	4100	47.24"	5.14"	3000K-4000K	80/90	Yes
WOR-SL-003MC-40	25W	4500	47.24"	5.14"	3000K-4000K	80/90	Yes
WOR-SL-003MF-40(LINKABLE)	15W	4100	47.24"	5.14"	3000K-4000K	80/90	Yes
WOR-SL-003MC-40(LINKABLE)	15W	4500	47.24"	5.14"	3000K-4000K	80/90	Yes

LED PANEL LIGHT



Features

- UL/CUL,DLC 4.2, certified, UL file#E492915
- High Brightness, Samsung LED chips
- High CRI80/90, PF>0.9, High Lighting Efficiency, 125Lm/W
- 0-10V, Dimming
- Suitable for Wide Range of Voltage, AC100-277V
- Seamless Frame:White/Silve Aluminum Frame
- PMMA Diffuser Plate
- 50,000 Hours Lifetime With 5 Years Warranty (Terms and Conditions Apply)

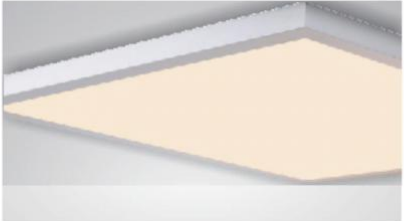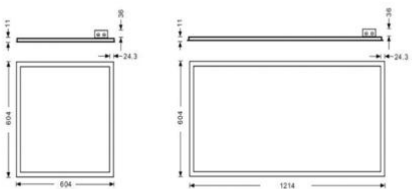

Product Specification


Model Number	Dimensions	Power	Standard	Premium	Voltage	CRI	Dimmable
WOR-DIPL3030	1'1FT	15W/24W	100lm/w	120lm/w	100-277V	80	Yes
WOR-DIPL3060	1'2FT	24W	100lm/w	120lm/w	100-277V	80	Yes
WOR-DIPL30120	1'4FT	26W/32W/40W	105lm/w	120lm/w	100-277V	80	Yes
WOR-DIPL6060	2.2FT	20W/26W/32W/40W	105lm/w	120lm/w	100-277V	80	Yes
WOR-DIPL60120	2.4FT	36W/40W/45W	105lm/w	120lm/w	100-277V	80	Yes

LED PANEL LIGHT



Features

- UL/CUL,DLC 4.2, certified, UL file#E492915
- High Brightness, Samsung LED chips
- High CRI80/90, PF>0.9, High Lighting Efficeiciency, 125Lm/W
- 0-10V, Dimming
- Suitable for Wide Range of Voltage, AC100-277V
- Seamless Frame:White/Silve Aluminum Frame
- PMMA Diffuser Plate
- 50,000 Hours Lifetime With 5 Years Warranty (Terms and Conditions Apply)

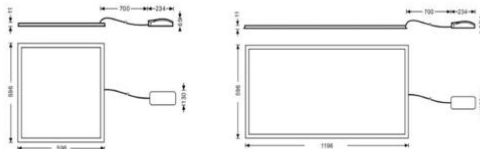

Product Specification


Model Number	Dimensions	Power	Standard	Premium	Voltafe	CRI	Dimmable
WOR-PL14-36W-100	1*4FT	36W	100lm/w	130lm/w	100-277V	80	Yes
WOR-PL22-30W-100	2*2FT	30W	120lm/w	130lm/w	100-277V	80	Yes
WOR-PL22-36W-100	2*2FT	36W	100lm/w	130lm/w	100-277V	80	Yes
WOR-PL22-40W-100	2*2FT	40W	120lm/w	130lm/w	100-277V	80	Yes
WOR-PL24-40W-100	2*4FT	40W	120lm/w	130lm/w	100-277V	80	Yes
WOR-PL24-50W-100	2*4FT	50W	105lm/w	130lm/w	100-277V	80	Yes
WOR-PL24-60W-100	2*4FT	60W	120lm/w	130lm/w	100-277V	80	Yes

LED PANEL LIGHT



Features

- CE,TUV,RoHs, FCC certified
- Easy Installation, Shatter Resistant, Shock and Vibration Resistant
- High Brightness
- High CRI80/90, PF>0.9, High Lighting Efficeiciency, 125Lm/W
- Suitable for Wide Range of Voltage, AC100-277V
- Seamless Frame:White/Silve Aluminum Frame
- PMMA Diffuser Plate
- 50,000 Hours Lifetime With 5 Years Warranty (Terms and Conditions Apply)

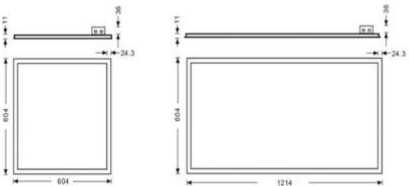

Product Specification

Model Number	Dimensions	Power	Standard	Premium	Voltafe	CRI	Dimmable
WOR-PXW-0312-36-100	1*4FT	36W	100lm/w	120lm/w	100-240V	80	Yes
WOR-PXW-0606-36-100	2*2FT	36W	100lm/w	120lm/w	100-240V	80	Yes
WOR-PXW-0606-40-100	2*2FT	40W	100lm/w	120lm/w	100-240V	80	Yes
WOR-PXW-0612-50-100	2*4FT	50W	100lm/w	120lm/w	100-240V	80	Yes
WOR-PXW-0612-60-100	2*4FT	60W	100lm/w	120lm/w	100-240V	80	Yes



CRESCENDO INDUSTRIES CORPORATION

Tel : 937. 286. 6758 Email:sales@crescendoind.com www.crescendoind.com



CRESCENDO INDUSTRIES CORPORATION

Tel : 937. 286. 6758 Email:sales@crescendoind.com www.crescendoind.com